

DESCRIPTION

The PFC130 series incorporates creative high efficiency circuitry, high power density (6.94 Watts/in³) and active Power Factor Correction (PFC) to meet the requirements of data networking, computing and telecommunication systems. Some models with one or two outputs adjustable between 5V and 24V intend to suit more applications.

FEATURES

- EN61000-3-2 class A and D compliant
- Power factor 0.98 typical
- Very compact size, 3"×5"×1.2"
- Overvoltage protection
- Short circuit protection
- Remote sense on 3.3V output
- Power Good/Power Fail Detect Signal
- Up to five DC outputs
- All outputs well regulated
- Compliant with RoHS requirements

New!!

PFC130 SERIES (MULTIPLE OUTPUT)



Safety Standard Approvals :



UL 60950 3rd, CSA C22.2 NO. 60950 3rd
File No. E137410



TÜV EN60950-1

INPUT SPECIFICATIONS

Input voltage :	90 to 264 VAC
Input frequency :	47 to 63 Hz
Input current :	2.1A (rms) max. for 115 VAC 1.1A (rms) max. for 230 VAC
Earth leakage current: (Touch Current)	0.3mA max. @ 115 VAC, 60 Hz 0.6mA max. @ 230 VAC, 50 Hz

OUTPUT SPECIFICATIONS

Output voltage/current :	See Rating Chart
Ripple and noise :	65mV peak to peak on V1, 1% peak to peak on other outputs
Overvoltage protection :	Provided on V0 & V1; set at 112-132% of its nominal output voltage
Overcurrent protection :	All outputs protected to short circuit conditions
Temperature coefficient :	All outputs ±0.04/°C maximum
Transient response :	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change
PG/PFD signal :	TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 10ms prior to master output dropping 5% below its nominal value. This signal also provides a minimum delay of 100ms after master output is within regulation

ENVIRONMENTAL SPECIFICATIONS

Operating temperature :	-10°C to +60°C
Storage temperature :	-40°C to +85°C
Relative humidity :	5% to 95% non-condensing
Derating :	Derate from 100% at +40°C linearly to 50% at +60°C
Cooling :	10 CFM total forced air from two 40mm diameter fans or the like is required and provided by user.

GENERAL SPECIFICATIONS


Switching frequency :	100 KHz ±10 KHz
Power factor :	0.98 typical
Efficiency :	75% typical
Hold-up time :	15 msec minimum at 115VAC
Line regulation :	±0.5% maximum at full load
Inrush current :	35 A @ 115 VAC or 70 A @ 230 VAC at 25°C cold start
Withstand voltage :	3000 VAC from input to output 1500 VAC from input to ground 500 VAC from output to ground 200,000 hours minimum
MTBF :	
EMC Performance (EN55024)	
EN55022:	Class B conducted, Class A radiated
FCC Part 15	Class B conducted, Class A radiated
VCCI:	Class B conducted, Class A radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 8KV air and ± 4KV contact
EN61000-4-3:	Radiated immunity, 3V/m
EN61000-4-4:	Fast transient/burst, ± 1KV
EN61000-4-5:	Surge, ± 1KV diff., ± 2KV com.
EN61000-4-6:	Conducted immunity, 3Vrms
EN61000-4-8:	Magnetic field immunity, 1A/m
EN61000-4-11:	Voltage dips, 30% reduction for 500ms and >95% reduction for 10ms

OUTPUT VOLTAGE/CURRENT RATING CHART

(1)(2) (5)(6) MODEL	V1(3) 5CFM 10CFM				V2 5CFM 10CFM				V3 (4) 5CFM 10CFM			V4 (4) 5CFM 10CFM			V0 5CFM 10CFM					
	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.	Vnom.	I _{max.}	I _{max.}	Tol.
PFC130-23-3A	+5.1V	8A	12A	2%	(N/A)				(N/A)			(N/A)			+3.3V	8A	12A	2%		
PFC130-23A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)			(N/A)			(N/A)					
PFC130-24A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)			(N/A)			(N/A)					
PFC130-25A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)			(N/A)			(N/A)					
PFC130-31A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			(N/A)				
PFC130-32A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			(N/A)				
PFC130-33A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			(N/A)				
PFC130-34A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	(N/A)				
PFC130-35A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	(N/A)				
PFC130-36A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	(N/A)				
PFC130-31-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)			(N/A)			+3.3V	8A	12A	2%		
PFC130-33-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)			(N/A)			+3.3V	8A	12A	2%		
PFC130-39-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)			(N/A)			+3.3V	8A	12A	2%		
PFC130-41A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-42A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-43A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	(N/A)			
PFC130-41-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			+3.3V	8A	12A	2%	
PFC130-42-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			+3.3V	8A	12A	2%	
PFC130-43-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	(N/A)			+3.3V	8A	12A	2%	
PFC130-44-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%	
PFC130-45-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%	
PFC130-46-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	(N/A)			-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%	
PFC130-51-3A	+5.1V	8A	12A	2%	+12V	3.25A	6A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-52-3A	+5.1V	8A	12A	2%	+15V	2.6A	4.8A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%
PFC130-53-3A	+5.1V	8A	12A	2%	+24V	1.63A	3A	3%	+5V~+24V	0.5A	1A	2%	-5V~-24V	0.5A	1A	2%	+3.3V	8A	12A	2%

NOTES:

- The outputs of each model are from two independent channels. Channel #1 consists of the main output V1 and auxiliary output V0. Channel #2 consists of the main output V2 and auxiliary outputs V3 and V4. The maximum output power that may be drawn from each channel is 45W with 5 CFM forced-air cooling or 65W with 10 CFM forced-air cooling. The derating curve on right provides guidelines on application within the specified operating temperature range.
- "5 CFM I_{max.}" ("10 CFM I_{max.}") is the maximum current of individual output when 5 CFM (10 CFM) forced air is provided. Under a specific cooling condition, both the maximum output power stated in note #1 and the maximum current of individual output must not be exceeded.
- V1 needs a minimum current of 0.8A to support output V0 at its maximum rated load.
- The total output power of V3 and V4 should not exceed 30W. V3 is adjustable between +5V and +24V, and set at +12V as standard. V4 is adjustable between -5V and -24V, and set at -12V as standard. It is welcome to consult factory for the two outputs to be set at wanted voltages within the adjustable ranges.
- Ripple and noise measured peak to peak across a 20MHz bandwidth by using a 12 inch twisted pair terminated with a 10uF tantalum capacitor in parallel with a 0.1uF ceramic capacitor.
- "Tol." Is output voltage tolerance which includes initial set-up error, thermal drift, line regulation, load regulation and cross regulation.

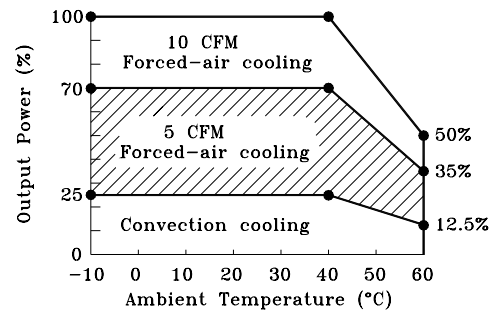


DERATING CURVE

UNIVERSAL INPUT-MULTIPLE OUTPUTS

PFC130 SERIES

MECHANICAL SPECIFICATIONS

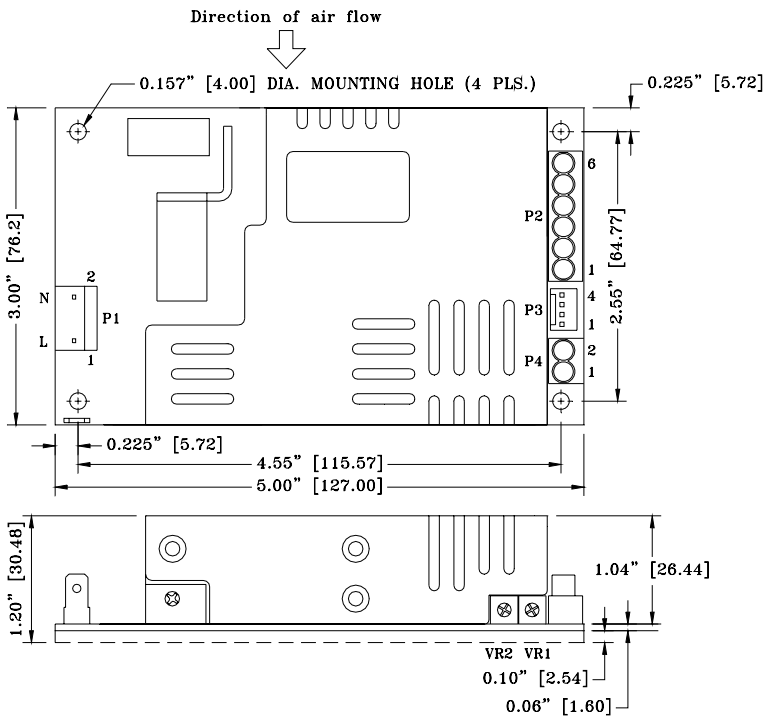

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Connector P1: Molex header 09-65-2038 or equivalent, mating with Molex housing 09-50-1031 or equivalent
4. Connectors P2 and P4 are suitable for AWG#18-AWG#12 electric wires.
5. Connector P3: Molex header 22-04-1041 or equivalent, mating with Molex housing 22-01-1043 or equivalent
6. Weight: 430 grams. (0.95 lbs.) approx.
7. Potentiometers for output voltage adjustments: VR1 for V1, VR2 for V0, VR3 for V3, VR4 for V4 (VR3 and VR4 being SMD type on trace side)

PIN CHART

MODEL	CONN PIN	P1		P2						P3				P4	
		1	2	1	2	3	4	5	6	1	2	3	4	1	2
PFC130-23-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	N.C.	N.C.	N.C.	-SENSE (VO)	+SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.
PFC130-23A PFC130-24A PFC130-25A									V2	N.C.	N.C.			VOID	
PFC130-31A PFC130-32A PFC130-33A							V3	N.C.		N.C.	N.C.	PG/PFD Signal	COM. RET.	VOID	
PFC130-34A PFC130-35A PFC130-36A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.		V4	V2			PG/PFD Signal	COM. RET.	VOID	
PFC130-31-3A PFC130-33-3A PFC130-39-3A							N.C.	N.C.		-SENSE (VO)	+SENSE (VO)			VO	COM. RET.
PFC130-41A PFC130-42A PFC130-43A								V4		N.C.	FAN			VOID	
PFC130-41-3A PFC130-42-3A PFC130-43-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	V3	N.C.	V2	-SENSE (VO)	+SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.
PFC130-44-3A PFC130-45-3A PFC130-46-3A							N.C.	V4						VO	COM. RET.
PFC130-51-3A PFC130-52-3A PFC130-53-3A		AC LIVE	AC NEUTRAL	V1	COM. RET.	COM. RET.	V3	V4	V2	-SENSE (VO)	+SENSE (VO)	PG/PFD Signal	COM. RET.	VO	COM. RET.