

## DESCRIPTION

The PUP120 series of AC/DC switching power supplies are for 96-120 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with an IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet CISPR 22 and FCC class B emission limits and comply with UL, CSA, IEC and CE requirements.

## FEATURES

- High Efficiency
- Low Ripple & Noise
- Overvoltage protection
- Short-circuit protection
- Overpower protection
- Over temperature protection
- 100% burn-in at full rated load
- Standby consumption less than 0.5 W
- Compliant with CEC and Energy Star efficiency level IV requirements  
(For all models except PUP120-12)
- \* No load power consumption less than 0.5 W
- \* Average active efficiency  $\geq 85\%$
- Compliant with RoHS requirements

## INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	50-60 Hz
Input current:	2.0 A (rms) for 115 VAC 1.0 A (rms) for 230 VAC
Touch current:	125 $\mu$ A max. @ 132 VAC, 60 Hz 250 $\mu$ A max. @ 264 VAC, 60 Hz


## OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	350 mV peak to peak maximum
Overvoltage protection:	Set at 110-140% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 $\mu$ s after a 25% step load change

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Relative humidity:	10% to 95% non-condensing

## PUP120 SERIES



## SAFETY STANDARD APPROVALS



UL 60950 3 rd, CSA C22.2 NO. 60950 3 rd  
File No. E137410



Nemko EN 60950: 2000  
Certificate NO. PO4202683

## GENERAL SPECIFICATIONS

Hold-up time:	15 ms minimum at 115 VAC
Turn on delay time:	2 S maximum
Power factor:	0.98 typical at 115 VAC
Efficiency:	86% min. (80% min. for PUP120-12 & PUP120-13)
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	60 A @ 115 VAC or 120 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to output
MTBF:	100,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK- 217F
EMC Performance (EN55024)	
EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, $\pm 8$ KV air and $\pm 4$ KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, $\pm 1$ KV
EN61000-4-5:	Surge, $\pm 1$ KV diff., $\pm 2$ KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms


## OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output						Average Active Efficiency (typical) @115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise <sup>(1)</sup>	Max. Output Power	
PUP120-12	12 V	0 A	8.0 A	±5%	350 mV	96 W	85 / 86 %
PUP120-13	15 V	0 A	7.0 A	±5%	350 mV	105 W	88 / 87 %
PUP120-13-1	18 V	0 A	6.67 A	±5%	350 mV	120 W	89 / 88 %
PUP120-13-2	19 V	0 A	6.32 A	±5%	350 mV	120 W	88 / 88 %
PUP120-13-3	20 V	0 A	6.0 A	±5%	350 mV	120 W	88 / 88 %
PUP120-14	24 V	0 A	5.0 A	±5%	350 mV	120 W	89 / 88 %
PUP120-16	30 V	0 A	4.0 A	±5%	350 mV	120 W	89 / 89 %
PUP120-17	36 V	0 A	3.34 A	±5%	350 mV	120 W	89 / 88 %
PUP120-18	48 V	0 A	2.5 A	±5%	350 mV	120 W	89 / 88 %

**NOTES:**

1. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATIONS

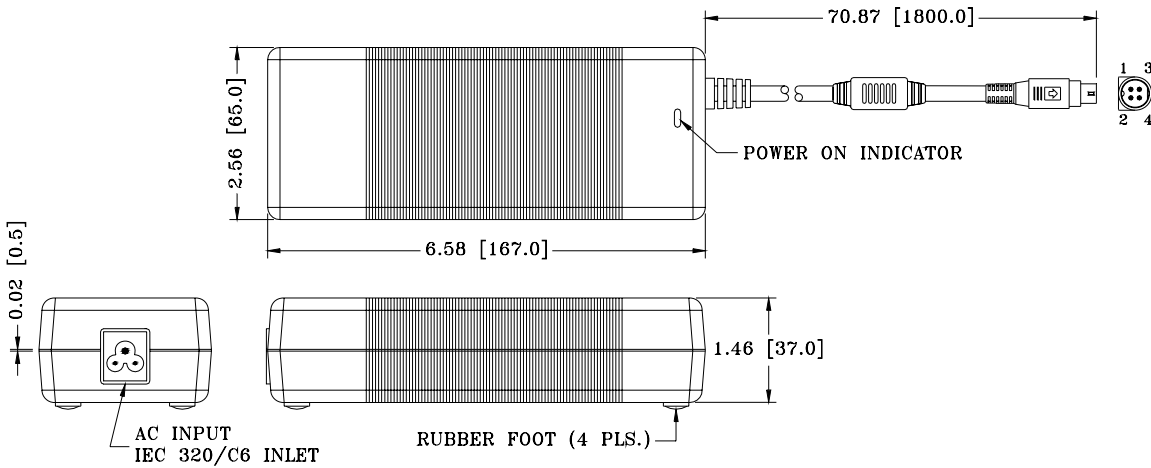

**NOTES:**

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 621 grams (1.37 lbs.) approx.
4. Refer to Section titled "OPTIONAL OUTPUT CONNECTORS". Add the suffix assigned for a selected connector to a wanted model number, e.g. PUP120-14-BI, for ordering. The output connector shown is for model PUP120-1X-BI, and its pinning is as shown in the following pin chart.

## PIN CHART

MODEL	PIN	1	2	3	4	SHELL OF CONNECTOR
PUP120-12	PUP120-14	V1 Return & AC Ground	+V1	V1 Return & AC Ground	+V1	V1 Return & AC Ground
PUP120-13	PUP120-16					
PUP120-13-1	PUP120-17					
PUP120-13-2	PUP120-18					
PUP120-13-3						