

## DESCRIPTION

The PMP105 series of AC/DC switching power supplies are for 90-105 watts of continuous output power. They are enclosed in a 94V-0 rated polycarbonate case with an IEC320/C14, C6, C18 or C8 inlet to mate with interchangeable cord for world-wide use. All models meet EN55011 class B emission limits, and are designed for medical applications.

## FEATURES

- Low safety ground leakage current
- Wide input range 90 to 264 VAC
- Optional output connectors
- 100% burn-in at full load
- Overvoltage protection
- Over temperature protection
- Overcurrent protection
- Compliant with CEC and Energy Star Efficiency level V requirements
  - \* No load power consumption less than 0.5 W
  - \* Average active efficiency greater than 87%
- Compliant with RoHS requirements

## INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.4 A (rms) for 115 VAC 0.7 A (rms) for 230 VAC
Earth leakage current:	200 µA max. @ 264 VAC, 63 Hz
Touch current:	100 µA max. @ 264 VAC, 63 Hz

## OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum at the full load
Over voltage protection:	Provided and set at 115-140% of its nominal output voltage, latching by recycle input to reset
Short circuit protection:	Automatic recovery
Over temperature protection:	Latching by recycle input to reset
Temperature coefficient:	±0.04% /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +60°C
Storage temperature:	-40°C to +85°C
Relative humidity:	5% to 95% non-condensing
Temperature derating:	Derate from 100% at +40°C linearly to 50% at +60°C

## PMP105 SERIES



RoHS



## SAFETY STANDARD APPROVALS



UL ES 60601-1, CSA C22.2 No. 60601-1  
File No. E178020



TÜV EN 60601-1

## GENERAL SPECIFICATIONS

Switching frequency:	70-140 KHz
Power factor:	0.98 Typical at 115 VAC
Efficiency:	87% min. at full load
Hold-up time:	10 ms minimum at 110 VAC
Line regulation:	±0.5% maximum at full load
Inrush current:	80 A @ 115 VAC or 120 A @ 230 VAC, at 25°C cold start
Withstand voltage:	5600 VDC from input to output (2 MOPP) 2100 VDC from input to ground (1 MOPP) 700 VDC from output to ground (To verify AC strength, get correct test method to avoid power supply damage.) For Class II models, 4000 VAC from input to output
MTBF:	150,000 hours at full load at 25°C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55011:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN60601-1-2	
EN61000-4-2:	ESD, ±15 KV air and ±8 KV contact
EN61000-4-3:	Radiated immunity, 9-28 V/m
EN61000-4-4:	Fast transient/burst, ±2 KV
EN61000-4-5:	Surge, ±1 KV diff., ±2 KV com
EN61000-4-6:	Conducted immunity, 10 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 100% reduction for 10 ms


## OUTPUT VOLTAGE/CURRENT RATING CHART

Model		Output							Average Active Efficiency (typical) @ 115 / 230 Vac
Class I <sup>(1)</sup>	Class II <sup>(2)</sup>	V1	I <sub>min.</sub>	I <sub>max.</sub>	Peak Current <sup>(3)</sup>	Tol.	Ripple & Noise <sup>(4)</sup>	Max. Power	
PMP105-12	PMP105SF-12	12 V	0 A	7.50 A	15.00 A	±5%	120 mV	90 W	87 /87%
PMP105-12-1	PMP105SF-12-1	13 V	0 A	6.93 A	13.80 A	±5%	130 mV	90 W	87 /87%
PMP105-13	PMP105SF-13	14 -16 V	0 A	6.79 A	13.58 A	±5%	150 mV	95 W	87 /88%
PMP105-13-1	PMP105SF-13-1	18 -19 V	0 A	5.84 A	11.60 A	±5%	180 mV	105 W	88 /88%
PMP105-13-3	PMP105SF-13-3	20 -21 V	0 A	5.25 A	10.50 A	±5%	200 mV	105 W	88 /89%
PMP105-14	PMP105SF-14	24 -25 V	0 A	4.38 A	8.70 A	±5%	240 mV	105 W	88 /89%
PMP105-15	PMP105SF-15	28 -29 V	0 A	3.75 A	4.50 A	±5%	280 mV	105 W	88 /89%
PMP105-16	PMP105SF-16	30 -32 V	0 A	3.50 A	4.20 A	±5%	300 mV	105 W	88 /89%
PMP105-17	PMP105SF-17	36 -38 V	0 A	2.92 A	3.50 A	±5%	360 mV	105 W	89 /90%
PMP105-18	PMP105SF-18	46 -50 V	0 A	2.29 A	2.70 A	±5%	480 mV	105 W	90 /91%

### NOTES:

- Class I models are equipped with IEC320/C14 inlet. To order a model with C6 inlet, add "S" to the prefix, PMP105, of model number, e.g. PMP105S-12.
- Class II models are equipped with IEC320/C8 inlet. To order a model with C18 inlet, change "SF" in the prefix of model number to "F", e.g. PMP105F-12.
- For 10 seconds maximum, average power not to exceed maximum power rating.
- Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATIONS

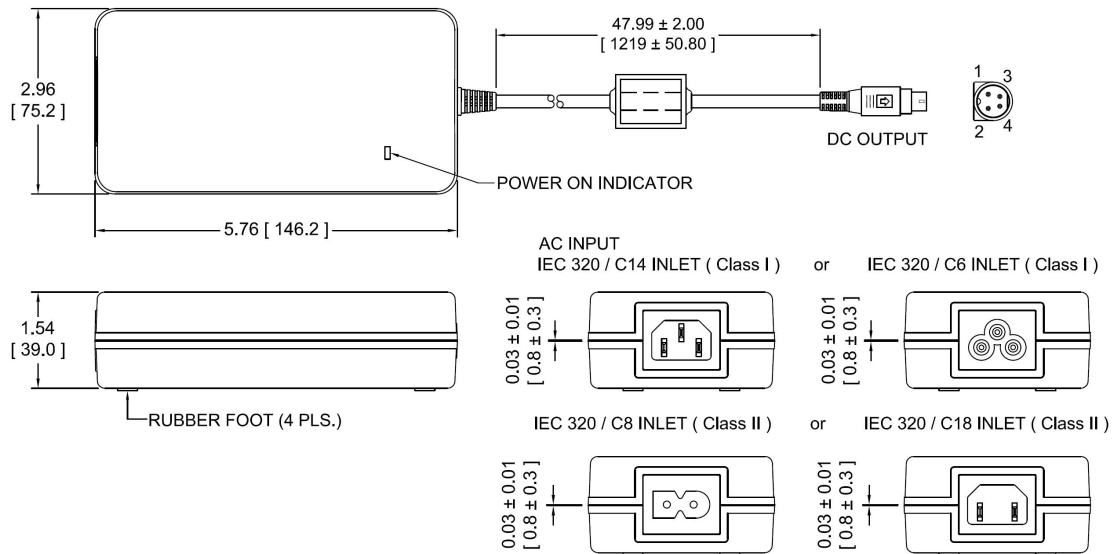

### NOTES:

- Dimensions shown in inches [mm], tolerance 0.02 [0.5] maximum.
- Weight: 681 grams (1.505 lbs.) approx.
- Refer to Section titled "OPTIONAL OUTPUT CONNECTORS". Add the suffix assigned for a selected connector to a wanted model number, e.g. PMP105-14-B1, for ordering.
- Output cable length of PMP105-12, PMP105-12-1, and PMP105-13 is 37.4 inches [950mm].

## PIN CHART

PIN	1	2	3	4
	V1 Return	+V1	V1 Return	+V1

## OUTPUT POWER DERATING CURVE

