

DESCRIPTION

The PU101 series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 100 watts of continuous power at 7.5 CFM forced air cooling or 80 watts at convection cooling. They operate at 80-264 VAC input voltage without the need of voltage selection. The units are certified to IEC/EN/UL/CSA 62368-1 and suitable for data networking, computer, telecommunication, audio/video and industrial applications.

FEATURES

- Operation altitude up to 5000 meters
- 2 x 4 inch footprint with 1.29 inch low profile
- Less than 175 μ A leakage current
- Meet EN55032 class B emissions
- Short-circuit protection
- Compliant with RoHS requirements
- No load power consumption less than 0.15W

INPUT SPECIFICATIONS

Input voltage:	80-264 VAC
Input frequency:	47-63 Hz
Input current:	2.0 A (rms) for 115 VAC 1.1 A (rms) for 230 VAC
Earth leakage current:	175 μ A max. @ 264 VAC, 63 Hz


OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum
Overvoltage protection:	set at 112-140% of its nominal output voltage
Overcurrent protection:	Output protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS


Operating temperature:	-20 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Temperature derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C, applicable to convection and forced-air cooling conditions

PU101 SERIES

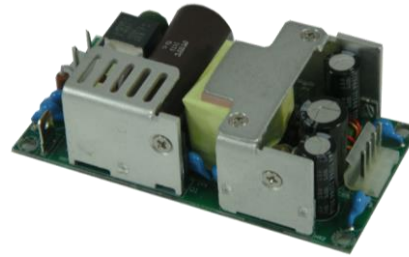

CE (LVD)
RoHS

SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1

TÜV EN 62368-1

GENERAL SPECIFICATIONS

Switching frequency:	22-70 KHz
Efficiency:	See rating chart.
Hold-up time:	10 ms minimum at 100 W load and 115 VAC 10 ms minimum at 80W load and 100 VAC
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	80 A @ 115 VAC or 160 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	4242 VDC from input to output, 2500 VDC from input to ground, 707 VDC from output to ground
MTBF:	150,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55032:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms

OUTPUT VOLTAGE/CURRENT RATING CHART




Model	Output							Efficiency (typical) 115/230 Vac
	V1	Min. load	Max. Current at convection	Max. Current at 7.5 CFM	Tol.	Ripple & Noise ⁽²⁾	Max. Power ⁽¹⁾	
PU101-12A	12 V	0 A	6.67 A	8.34 A	±2%	120 mV	80 W /100 W	87 /90%
PU101-13A	15 V	0 A	5.34 A	6.67 A	±2%	150 mV	80 W /100 W	87 /90%
PU101-13-1A	18 V	0 A	4.45 A	5.56 A	±2%	180 mV	80 W /100 W	87 /90%
PU101-14A	24 V	0 A	3.34 A	4.17 A	±2%	240 mV	80 W /100 W	88 /90%
PU101-15A	28 V	0 A	2.86 A	3.58 A	±2%	280 mV	80 W /100 W	88 /90%
PU101-16-1A	32 V	0 A	2.50 A	3.13 A	±2%	320 mV	80 W /100 W	88 /90%
PU101-17A	36 V	0 A	2.23 A	2.78 A	±2%	360 mV	80 W /100 W	88 /90%
PU101-18A	48 V	0 A	1.67A	2.09 A	±2%	480 mV	80 W /100 W	88 /90%

NOTES:

1. The first value of max. power is at convection cooling. The second value is with 7.5 CFM forced air provided by user.
2. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output except model PU101-12A which is with a 22 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

OUTPUT POWER DERATING CURVE

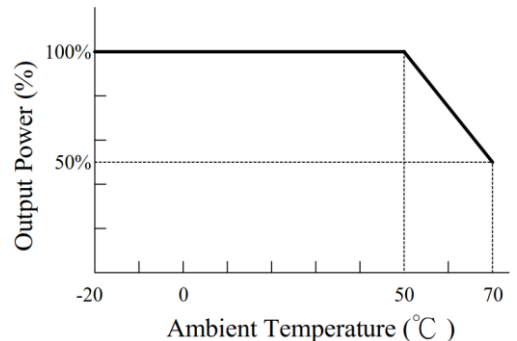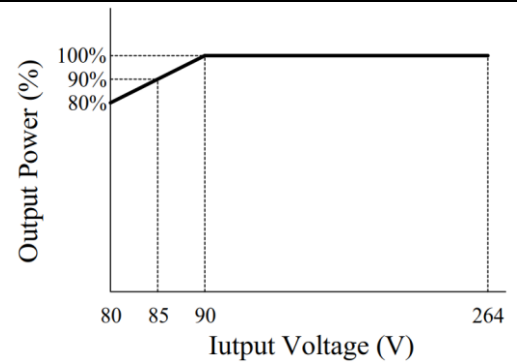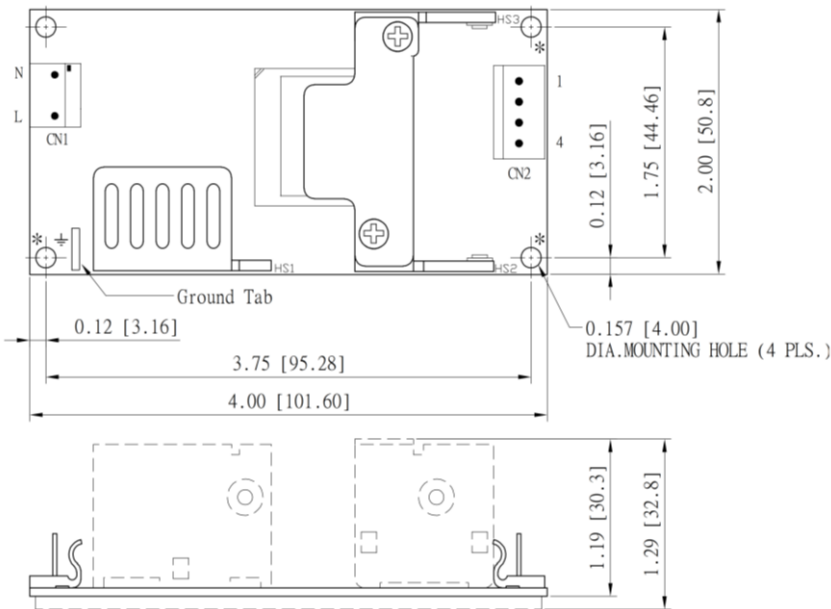

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1: Molex header 09-65-2038, mating with Molex housing 09-50-1031 or equivalent.
4. Output connector P2: Molex header 09-65-2048, mating with Molex housing 09-50-1041 or equivalent.
5. Ground tab is 0.25 [6.35] x 0.032 [0.8] fast-on connector.
6. To ensure compliance with level B emissions, connect the three "*" marked mounting holes with metallic standoffs to chassis.
7. Weight: 155 grams (0.34 lbs.) approx.

PIN CHART

Connect	CN1			CN2			
PIN NO.	1	2	3	1	2	3	4
Polarity	Live	Void	Neutral	+V1	+V1	Common Return	Common Return