

DESCRIPTION

The PUP50/60/65/75/84N3 series of AC-DC switching power supplies are for 50 to 84 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an IEC320/C14 or IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet EN55032, EN55035 and FCC class B emission limits and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.075w
- Compliant with DoE level VI requirements
- Meet energy star EPS2.0 /ErP lot 7
- Meet EU CoC EPS V5 Tier2
- Operating altitude up to 5000 meters
- Overvoltage protection (auto-recovery)
- Short-circuit protection (auto-recovery)
- Overcurrent protection (auto-recovery)
- High Efficiency
- 100% burn-in at full rated load
- Compliant with RoHS requirements
- Meet LPS requirements except PUP84N3-12 and PUP84N3S-12

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.0A (rms) for 110 Vac 0.65A (rms) for 240 Vac
Earth leakage current:	250 µA max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Set at 115-200% of its nominal output voltage
Overcurrent protection:	Protect to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +40°C
Storage temperature:	-20°C to +80°C
Operating humidity:	20% to 80% non-condensing
Storage humidity:	10% to 90% non-condensing
Temperature derating:	Derate from 100% at +40°C linearly to 50% at +60°C

PUP50/60/65/75/84N3 SERIES



SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1
File No. E190414



TÜV EN 62368-1

GENERAL SPECIFICATIONS

Hold-up time:	8 ms minimum at 115 VAC
Turn on delay time:	3 s maximum at 115 VAC
Efficiency:	85% minimum at full load
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	60 A @ 115 VAC or 120 A @ 230 VAC at 25°C cold start
Withstand voltage:	4242 VDC from input to output, 2500 VDC from input to ground,
MTBF:	300,000 hours at full load at 25°C ambient, calculated per SR-332 Issue2
EMC Performance	
EN55032:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class A and D
EN61000-3-3:	Line flicker
EN55035	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms

OUTPUT VOLTAGE/CURRENT RATING CHART


Model ⁽¹⁾	Output						Average efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Power	
PUP50N3-12	12 V	0 A	4.17 A	±5%	120 mV	50 W	87 / 88%
PUP50N3-14	24 V	0 A	2.09 A	±5%	200 mV	50 W	88 / 89%
PUP60N3-12	12 V	0 A	5.00 A	±5%	120 mV	60 W	87 / 88%
PUP60N3-14	24 V	0 A	2.50 A	±5%	200 mV	60 W	89 / 89%
PUP65N3-12	12 V	0 A	5.42 A	±5%	120 mV	65 W	88 / 89%
PUP75N3-12	12 V	0 A	6.25 A	±5%	200 mV	75 W	88 / 89%
PUP75N3S-12	12 V	0 A	6.25 A	±5%	200 mV	75 W	88 / 89%
PUP84N3-12	12 V	0 A	7.00 A	±5%	150 mV	84 W	88 / 89%
PUP84N3S-12	12 V	0 A	7.00 A	±5%	150 mV	84 W	88 / 89%

NOTES:


- PUP50/60/65/75/84N3 models are equipped with IEC320/C14 inlet, PUP75/84N3S models are equipped with IEC320/C6 inlet.
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47 μ F electrolytic capacitor in parallel with a 0.1 μ F ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

Exterior dimension of PUP50/60/65N3

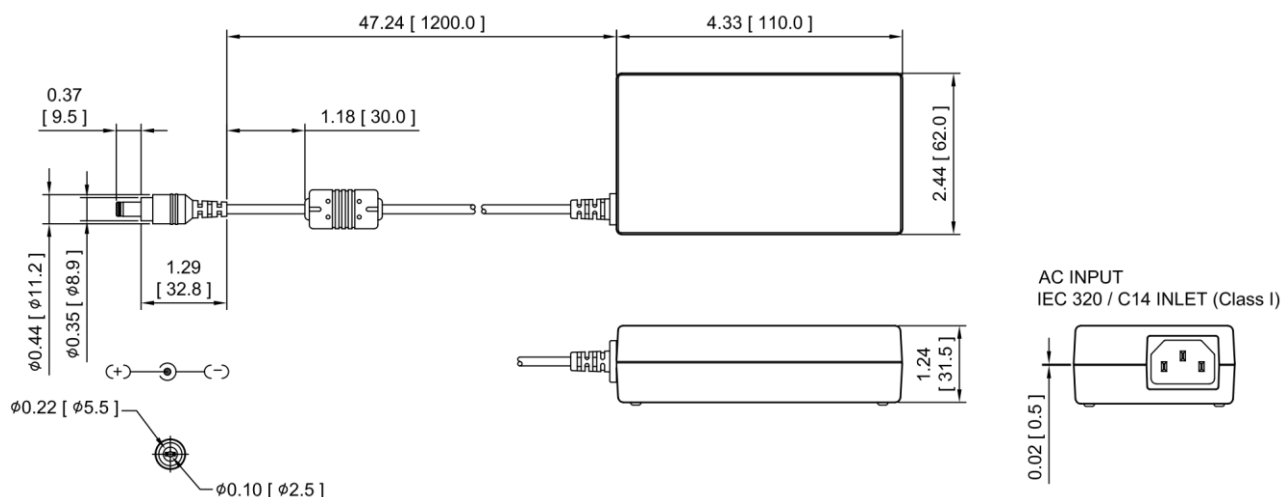

Exterior dimension of PUP75/84N3 & PUP75/84N3S

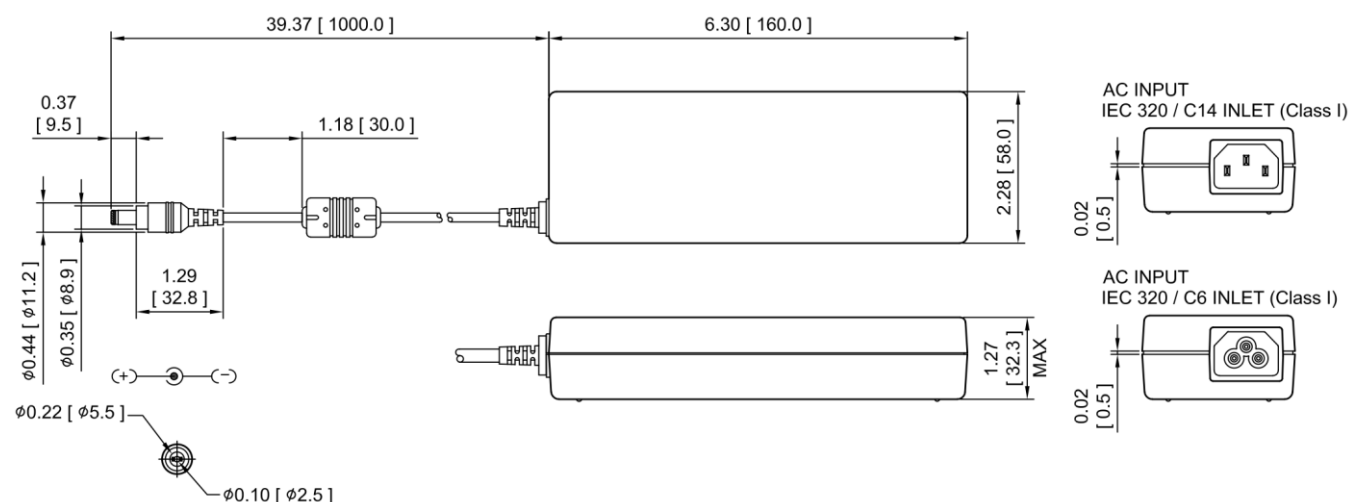

NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 260 grams (0.57 lbs.) approx.
- Output return (-) is electrically connected to incoming Earth Ground through a 0 ohm resistor as standard.